






# Nickel plated steel. Nickel-Nickel coated strips.

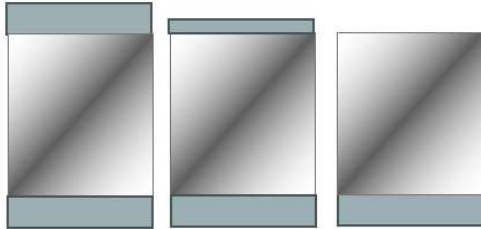


| Nickel Coating  |  |  |   |
|---|--|--|---|
| <ul style="list-style-type: none"> <li>• 0 µm to 8 µm (total thickness)</li> <li>• Differential Nickel coating available</li> </ul> |  |  |   |
| Dimension coil  |  |  |   |
| Thickness   | Width  | Weight   |   |
| 0.2 mm – 1.00 mm  | 660 mm – 735 mm  | 7 tons max   |   |
| Dimension of strip  |  |  |   |
| Thickness   | Width  | Inner diameter   |   |
| 0.15 mm – 1.00 mm   | 12.0 mm – 735 mm   | 400 mm – 508 mm  |   |
| Packing   |  |  |   |
|    |  |  |  |

**Oiling:** anti-corrosion. Standard packaging: on wooden box, vertical axis, plastic cover.  
**Other packaging:** upon request

## Nickel - Nickel Plated steel strip (Standard: Euro-norms 10139 & 10140)

| Grades             | Delivery Status               |
|--------------------|-------------------------------|
| DC01 / DC03 / DC04 | A (Annealed) - LC (skin-pass) |
| DC05 / DC06        | LC (skin-pass)                |
| *Other on demand   | Temper C290 – C690            |

|  | Surface   | Roughness                    |
|---|-----------|------------------------------|
|   | MA        | RM: $0.6 < Ra < 1.8 \mu m$ * |
|   | MB        | RL: $Ra < 0.6 \mu m$         |
|   | * + Other | *On demand                   |

### Production Process

